


USE NCDOT
CLASS "B"
CONCRETE

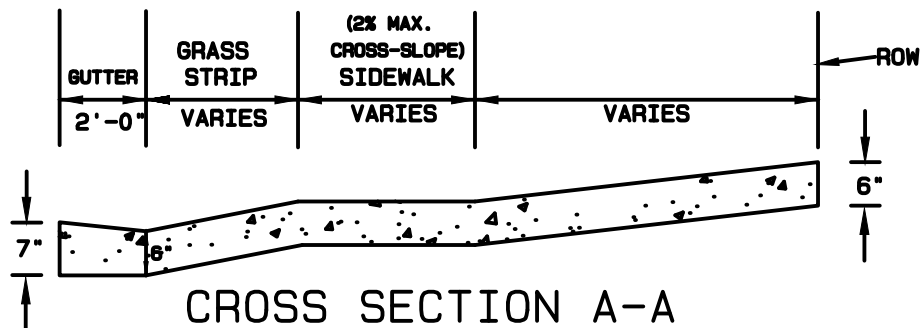

MINIMUM REQUIREMENTS**

	LOCAL	COLLECTOR	THOROUGHFARE
RADIUS (R)	15'	20'	25'
GRASS STRIP	3'	3'	5'
MINIMUM DRIVEWAY WIDTH (W)	24'	24'	24'

**SEE COG DRIVEWAY MANUAL FOR DETAILED INFORMATION

-NO DRIVEWAY SHALL BE LOCATED WITHIN 5' (AS MEASURED ALONG THE STREET CURB STARTING AT THE DRIVEWAY RADIUS) OF ANY MUNICIPAL OR STATE OWNED FEATURE (I.E. CURB INLETS, FIRE HYDRANTS, UTILITY POLES OR SIMILAR STRUCTURES)

-STREET TYPE DRIVEWAY SHALL BE USED ON ALL COMMERCIAL DRIVEWAYS LOCATED ON THOROUGHFARES. STREET TYPE DRIVEWAYS MAY ALSO BE REQUIRED ON COLLECTOR STREETS BASED ON BUSINESS TYPE AND TRAFFIC VOLUME. SUCH DETERMINATION WILL BE MADE DURING THE COMMERCIAL DRIVEWAY PERMITTING PROCESS.

CITY OF GREENSBORO

DRIVEWAY-COMMERCIAL STREET TYPE

STD. NO.

REV.

416-B

09-11
12-12