



THE PIPE SHOULD ALWAYS BE INSTALLED WITH THE PIPE INVERT AT THE SAME ELEVATION AS THE DITCH INVERT. THE PIPE SHOULD NEVER BE INSTALLED ABOVE THE DITCH INVERT. IF THE PIPE MUST BE INSTALLED BELOW THE DITCH INVERT, HEAD AND TAIL DITCHING WILL BE REQUIRED FOR A SMOOTH TRANSITION.

SECTION THRU DRIVEWAY APPROACH

THIS SECTION IS TO BE USED WHEN PROPERTY IS SITUATED HIGHER THAN STREET

NOTE:
THIS TYPICAL SECTION IS TO BE USED IN THE WATERSHED CRITICAL AREA (WCA) PROTECTION DISTRICT ONLY, IN ACCORDANCE WITH STREET DESIGN STANDARDS FOR THE WCA.

CITY OF GREENSBORO		
NON-CURB AND GUTTER SUBDIVISION STREET (TYPICAL)	STD. NO.	REV.
	609	03-07 03-08 03-18

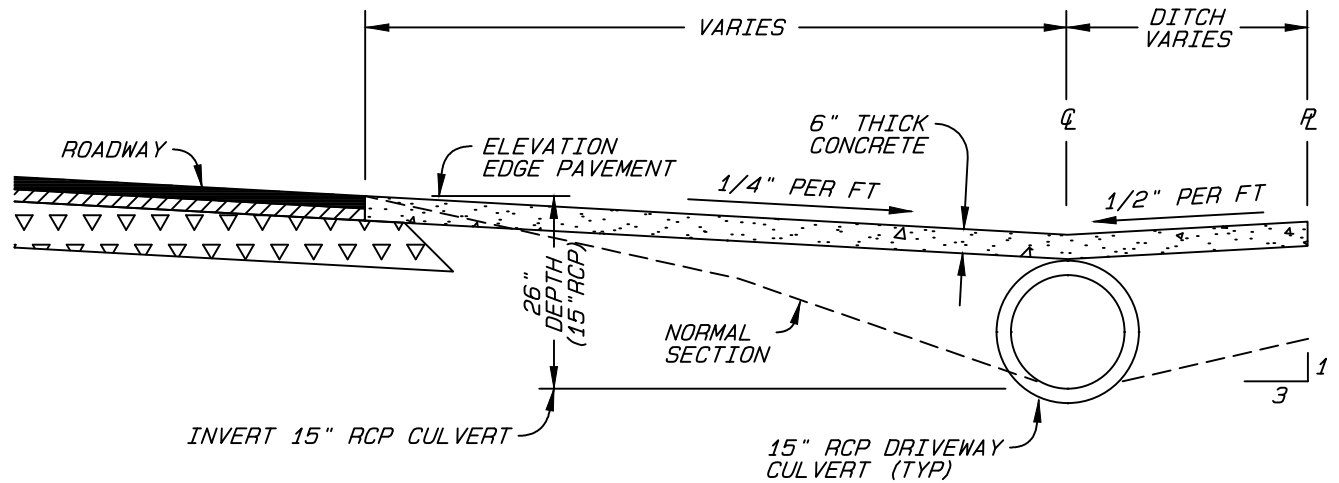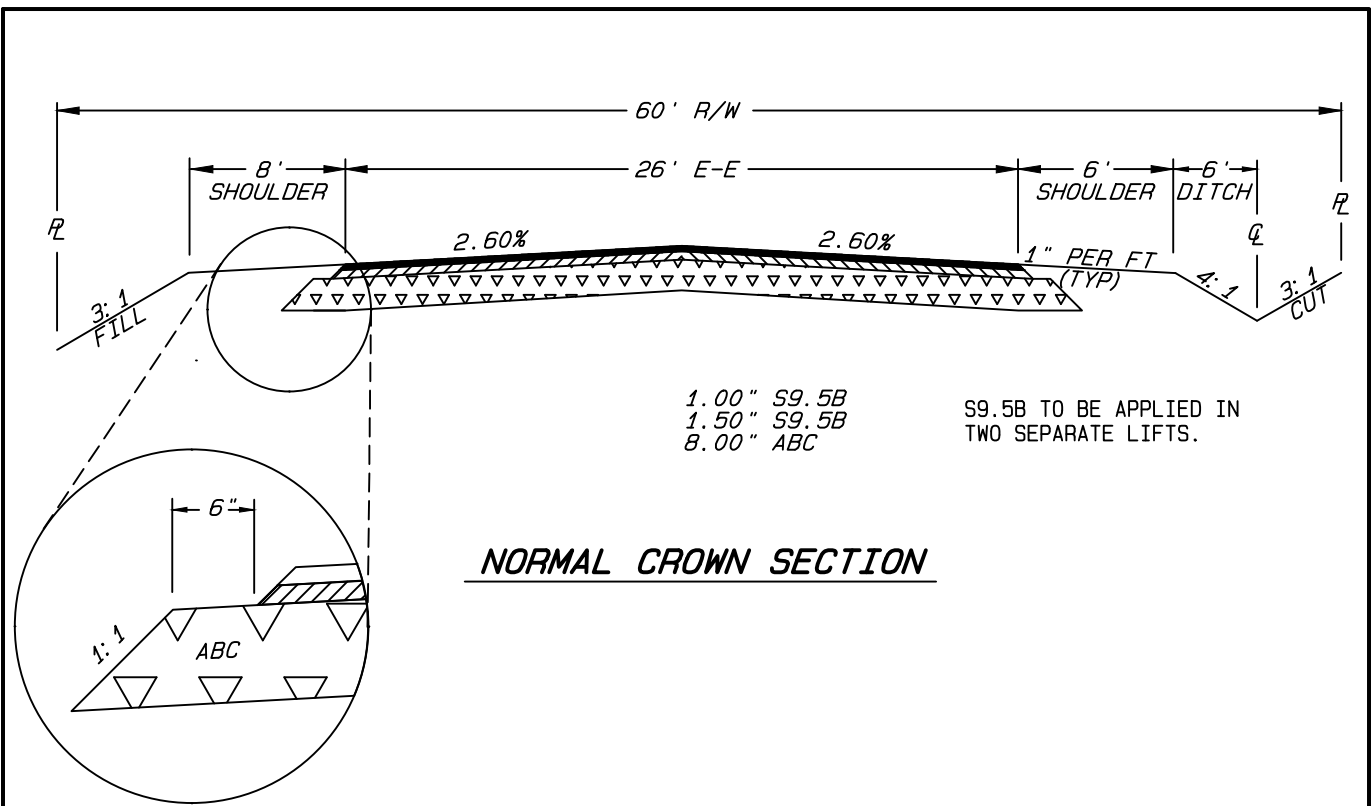

THIS SECTION IS TO BE USED WHEN THE PROPERTY IS SITUATED LOWER THAN THE STREET

NOTE:

THIS TYPICAL SECTION IS TO BE USED IN THE WATERSHED CRITICAL AREA (WCA) PROTECTION DISTRICT ONLY, IN ACCORDANCE WITH STREET DESIGN STANDARDS FOR THE WCA.

2 of 2

CITY OF GREENSBORO

NON-CURB AND GUTTER
SUBDIVISION STREET (TYPICAL)

STD. NO.

609

REV.

03-07
03-08
03-18