


NORMAL CROWN SECTION

NOTE:
MAX. CURB ELEVATION DIFFERENTIAL FOR NORMAL CROWN SECTION IS 0.70'.

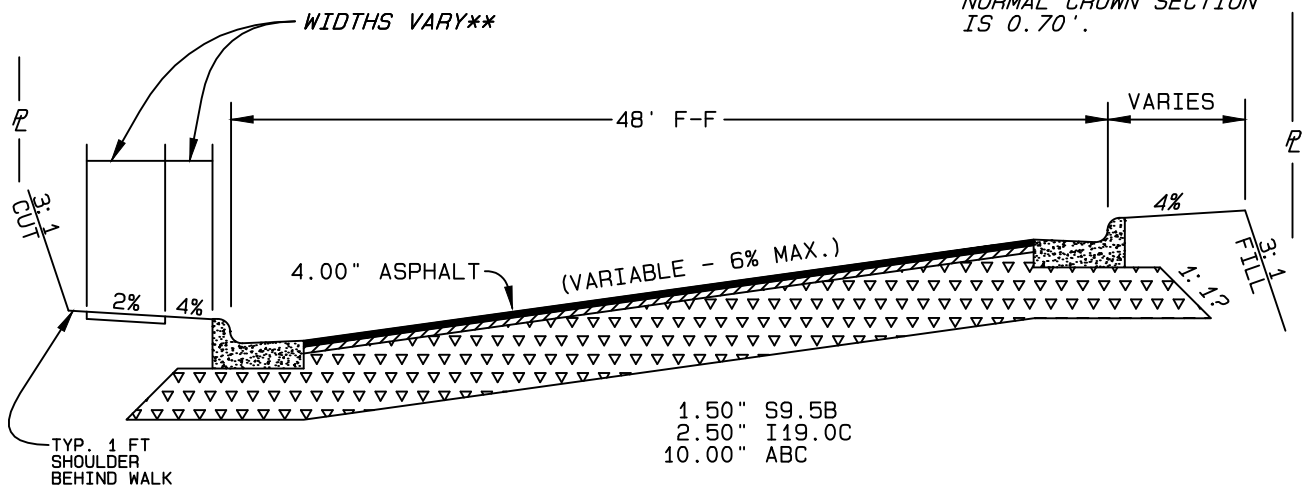

SUPERELEVATED SECTION

**NOTE:
SEE THE "STREET DESIGN STANDARDS MANUAL" PUBLISHED BY THE CITY OF GREENSBORO'S DEPT. OF TRANSPORTATION IN ORDER TO DETERMINE THE LOCATION OF SIDEWALKS, SIDEWALK WIDTH AND GRASS STRIP WIDTH. COG STD #418-A HAS A SUMMARY OF THEIR GUIDELINES AS THEY RELATE TO SIDEWALK LOCATION, SIDEWALK WIDTH AND GRASS STRIP WIDTH.

CURB ELEV. DIFF.	CURB ELEV. DIFF.
0.70'	1.59
0.80'	1.82
0.90'	2.02
1.00'	2.27
1.10'	2.50
1.20'	2.73
1.30'	2.96
1.40'	3.18
1.50'	3.41