


**CROWN 1" BELOW TOP OF CURB**

**NORMAL CROWN SECTION**

NOTE:  
MAX. CURB ELEVATION  
DIFFERENTIAL FOR  
NORMAL CROWN SECTION  
IS 0.30'.

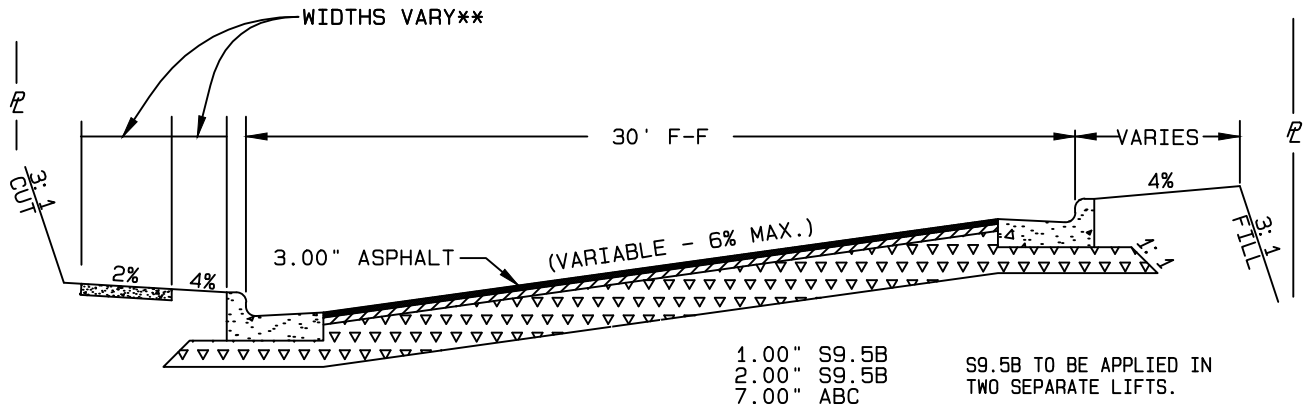

**SUPERELEVATED SECTION**

S9.5B TO BE APPLIED IN  
TWO SEPARATE LIFTS.

\*\*NOTE:  
SEE THE "STREET DESIGN STANDARDS MANUAL" PUBLISHED  
BY THE CITY OF GREENSBORO'S DEPT. OF TRANSPORTATION  
IN ORDER TO DETERMINE THE LOCATION OF SIDEWALKS,  
SIDEWALK WIDTH AND GRASS STRIP WIDTH.  
COG STD #418-A HAS A SUMMARY OF THEIR GUIDELINES  
AS THEY RELATE TO SIDEWALK LOCATION, SIDEWALK  
WIDTH AND GRASS STRIP WIDTH.

CURB ELEV. DIFF.	%GRADE
0.50'	1.92
0.60'	2.30
0.70'	2.60
0.80'	3.08
0.90'	3.46
1.00'	3.85

**CITY OF GREENSBORO**

STREET SECTION,  
30' FACE TO FACE

STD. NO.

603

REV.

09-03	06-08
03-04	12-12
06-04	03-18